




## Triaxial Cable

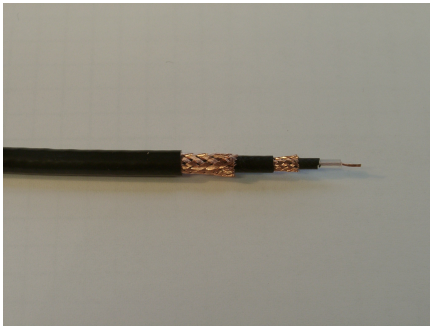

Type	Low Noise Triax HS-G-01330
Feature	semiconductor layer between dielectricum and inner braid
Dielectricum	PE
Impedance	50 Ohm
Max Operating Voltage	1 kV(rms)
Capacitance	104 pF/m
Temp. Range	-25 °C .. +85 °C
Min. Bending Radius	20 mm (static)
Outer Jacket Dia.	4.3 mm
Jacket Colour	black
Availability	as of 1 m
Price, Sample	on request

## Triaxial Connectors



Type	Fischer Connectors
Series	102
Dielectric Strength	1 kV(rms, test voltage)
Insolation	PEEK
Termination	solder
Length	approx. 35 mm
Diameter	approx. 10 mm
Availability	as of 1 piece
Price	on request



Type	Trompeter
Series	70, Cable Plug 3-LUG
Max Operating Voltage	400 V(rms)
Insolation	PTFE
Termination	solder
Length	approx. 32 mm
Diameter	approx. 15 mm
Availability	as of 1 piece
Price	on request

all our assembled cables are

- *continuity tested*
- *high voltage tested for operation up to 300 VDC*
- *delivered with test certification*